
		DEPARTMENT OF	TE OF UTAH F NATURAL RES OIL, GAS AND M			FORI		
APPLI	CATION FOR	PERMIT TO DRILL			1. WELL NAME and	NUMBER CWU 1267-22		
2. TYPE OF WORK DRILL NEW WELL	REENTER P8	A WELL (DEEPEN)	WELL (1)		3. FIELD OR WILDCAT NATURAL BUTTES			
4. TYPE OF WELL Gas We		ed Methane Well: NO			5. UNIT or COMMU	NITIZATION AGREI CHAPITA WELLS	EMENT NAME	
6. NAME OF OPERATOR	EOG Resou				7. OPERATOR PHO			
8. ADDRESS OF OPERATOR), Vernal, UT, 84078			9. OPERATOR E-MA		es.com	
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)	<i>J</i> ,	11. MINERAL OWNERS		3 (3)	12. SURFACE OWN	ERSHIP		
UTU01301 13. NAME OF SURFACE OWNER (if box 12	= 'fee')	FEDERAL (INDIA	N () STATE () FEE	FEDERAL INI	DIAN (STATE (ER PHONE (if box 1	~ ~	
15. ADDRESS OF SURFACE OWNER (if box	12 = 'fee')				16. SURFACE OWN	ER E-MAIL (if box 1	.2 = 'fee')	
17. INDIAN ALLOTTEE OR TRIBE NAME		18. INTEND TO COMM	INGLE PRODUCT	ON FROM	19. SLANT			
(if box 12 = 'INDIAN')		MULTIPLE FORMATION YES (Submit Com	NS nmingling Application	on) NO 📵	VERTICAL (DIF	RECTIONAL (HO	ORIZONTAL (
20. LOCATION OF WELL	FC	OTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN	
LOCATION AT SURFACE	1980 F	SL 1980 FEL	NWSE	22	9.0 S	23.0 E	S	
Top of Uppermost Producing Zone	1980 F	SL 1980 FEL	NWSE	22	9.0 S	23.0 E	S	
At Total Depth	1980 F	SL 1980 FEL	NWSE	22	9.0 S	23.0 E	S	
21. COUNTY UINTAH		22. DISTANCE TO NEA	REST LEASE LINI 1980	(Feet)	23. NUMBER OF AC	RES IN DRILLING U 2520	JNIT	
		25. DISTANCE TO NEA (Applied For Drilling o	r Completed)	AME POOL	26. PROPOSED DEF	PTH : 8790 TVD: 8790		
			1185		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 49-275			
27. ELEVATION - GROUND LEVEL 5099		28. BOND NUMBER	NM2308				F APPLICABLE	
						PROVAL NUMBER I	F APPLICABLE	
	ARE ATTACH	ATT	NM2308	AH OIL AND	WATER RIGHTS AP	PROVAL NUMBÉR I 49-225		
5099		ATT	NM2308 ACHMENTS E WITH THE UT	AH OIL AND PLETE DRILLIN	WATER RIGHTS AP	PROVAL NUMBÉR I 49-225		
VERIFY THE FOLLOWING	LICENSED SUR	ATTA	ACHMENTS WITH THE UT	PLETE DRILLIN	WATER RIGHTS AP	PROVAL NUMBÉR I 49-225		
VERIFY THE FOLLOWING WELL PLAT OR MAP PREPARED BY	LICENSED SUR	ATT. ED IN ACCORCANCE EVEYOR OR ENGINEER EMENT (IF FEE SURFAC	NM2308 CACHMENTS E WITH THE UT COMI	PLETE DRILLIN	GAS CONSERVATI G PLAN OR IS OTHER THAN TO	PROVAL NUMBÉR I 49-225		
VERIFY THE FOLLOWING WELL PLAT OR MAP PREPARED BY AFFIDAVIT OF STATUS OF SURFACE DIRECTIONAL SURVEY PLAN (IF DI	LICENSED SUR OWNER AGRE RECTIONALLY	ATT. ED IN ACCORCANCE EVEYOR OR ENGINEER EMENT (IF FEE SURFAC	NM2308 CACHMENTS E WITH THE UT COMI	PLETE DRILLIN	GAS CONSERVATI G PLAN OR IS OTHER THAN THE	PROVAL NUMBÉR I 49-225		
VERIFY THE FOLLOWING WELL PLAT OR MAP PREPARED BY AFFIDAVIT OF STATUS OF SURFACE DIRECTIONAL SURVEY PLAN (IF DIDRILLED)	OWNER AGRE RECTIONALLY	ATTA ED IN ACCORCANCE EVEYOR OR ENGINEER EMENT (IF FEE SURFACTOR HORIZONTALLY	NM2308 CACHMENTS E WITH THE UT COMI	5. IF OPERATO GRAPHICAL MA PHONE 435	GAS CONSERVATI G PLAN OR IS OTHER THAN THE	PROVAL NUMBÉR I 49-225 ON GENERAL RU HE LEASE OWNER		
VERIFY THE FOLLOWING WELL PLAT OR MAP PREPARED BY AFFIDAVIT OF STATUS OF SURFACE DIRECTIONAL SURVEY PLAN (IF DIDRILLED) NAME Kaylene Gardner	OWNER AGRE RECTIONALLY	ATTA ED IN ACCORCANCE EVEYOR OR ENGINEER EMENT (IF FEE SURFACT OR HORIZONTALLY Regulatory Administrator 4/08/2009	NM2308 CACHMENTS E WITH THE UT COMI	5. IF OPERATO GRAPHICAL MA PHONE 435	GAS CONSERVATI G PLAN OR IS OTHER THAN TO	PROVAL NUMBÉR I 49-225 ON GENERAL RU HE LEASE OWNER		

API Well No: 43047503350000 Received: 4/3/2009

	Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)			
Prod	7.875	4.5	0	8790			
Pipe	Grade	Length	Weight				
	Grade P-110 LT&C	8790	11.6				

API Well No: 43047503350000 Received: 4/3/2009

	Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)			
Surf	12.25	9.625	0	2300			
Pipe	Grade	Length	Weight				
	Grade J-55 ST&C	2300	36.0				

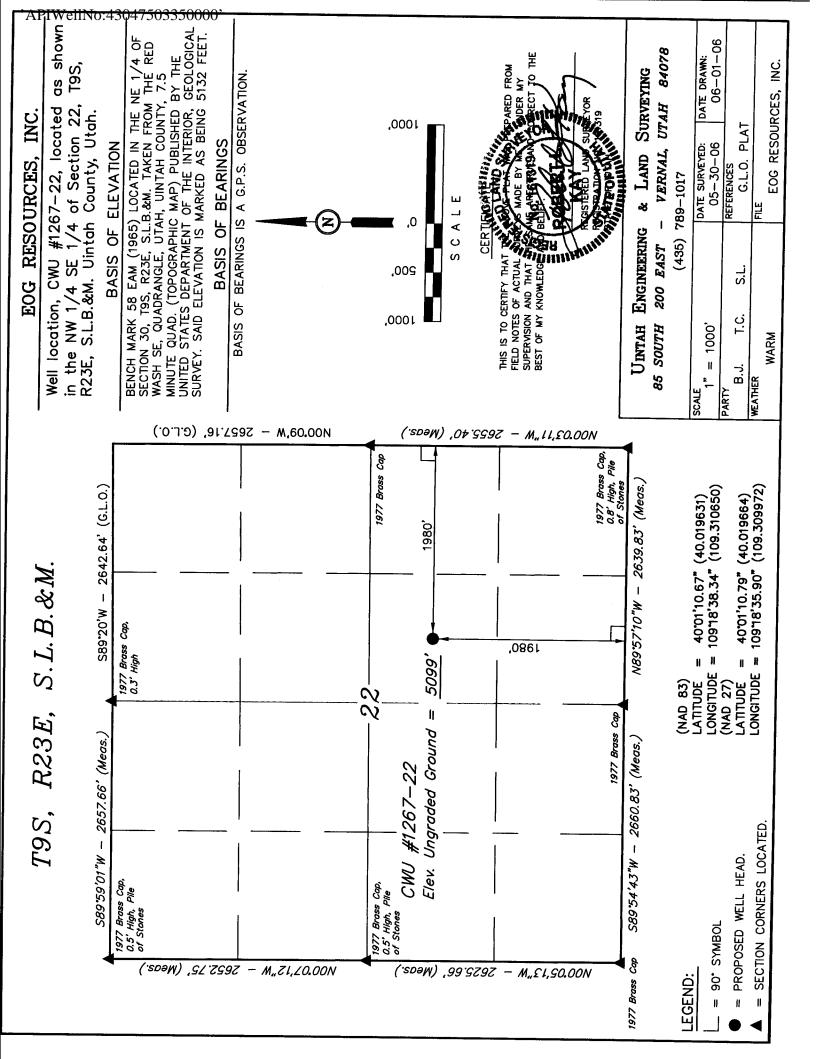

CHAPITA WELLS UNIT 1267-22

NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Green River	1,528		Shale	
Birdsnest Zone	1,699		Dolomite	
Mahogany Oil Shale Bed	2,208		Shale	
Wasatch	4,442		Sandstone	
Chapita Wells	4,216		Sandstone	
Buck Canyon	5,677		Sandstone	
North Horn	6,226		Sandstone	
KMV Price River	6,498	Primary	Sandstone	Gas
KMV Price River Middle	7,279	Primary	Sandstone	Gas
KMV Price River Lower	8,069	Primary	Sandstone	Gas
Sego	8,590		Sandstone	
TD	8,790			

Estimated TD: 8,790' or 200'± below TD

Anticipated BHP: 4,799 Psig

- 1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
- 2. Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig BOP schematic diagrams attached.

4. CASING PROGRAM:

CASING	Hole Size	<u>Length</u>	Size	WEIGHT	<u>Grade</u>	Thread	Rating Collapse	Factor Burst	Tensile
Conductor	26"	0 – 60'	16"	65.0#	H-40	STC	670 PSI	1640 PSI	736#
Surface	12 1/4"	0-2,300 KB±	9 5/8"	36.0#	J-55	STC	2020 PSI	3520 PSI	394,00#
Production	7- ½"	Surface - TD	4-1/2"	11.6#	P-110	LTC	7560 PSI	10,690 Psi	279,000#

Note: 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone.

All casing will be new or inspected.

CHAPITA WELLS UNIT 1267-22 NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

5. Float Equipment:

Surface Hole Procedure (0'- 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of its. #2 and #3 then every 5th joint to surface. (15 total)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD):

Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

CHAPITA WELLS UNIT 1267-22 NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 1
Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations

- EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
- EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by water mist.
- o EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
- EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

8. EVALUATION PROGRAM:

Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:

Cement Bond / Casing Collar Locator and GR

CHAPITA WELLS UNIT 1267-22 NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: 185 sks Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂,

3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: 207 sks Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk.,

5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6

ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail

cement to 500'above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: 118 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44

(Salt),0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29

(cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: 847 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075%

D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant),

mixed at 14.1 ppg, 1.28 ft³/sk., 5.9gps water.

Note: The above number of sacks is based on gauge-hole calculation.

Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe. Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

Final Cement volumes will be based upon gauge-hole plus 45% excess.

CHAPITA WELLS UNIT 1267-22 NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

13. Air Drilling Operations:

- 1. Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
- 2. Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
- 3. Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
- 4. The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
- 5. Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
- 6. EOG Resources, Inc. will use a properly maintained and lubricated stripper head.


(Attachment: BOP Schematic Diagram)

CHAPITA WELLS UNIT 1267-22

NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

EOG RESOURCES 11" 5,000 PSI W.P. BOP CONFIGURATION

PAGE 1 OF 2

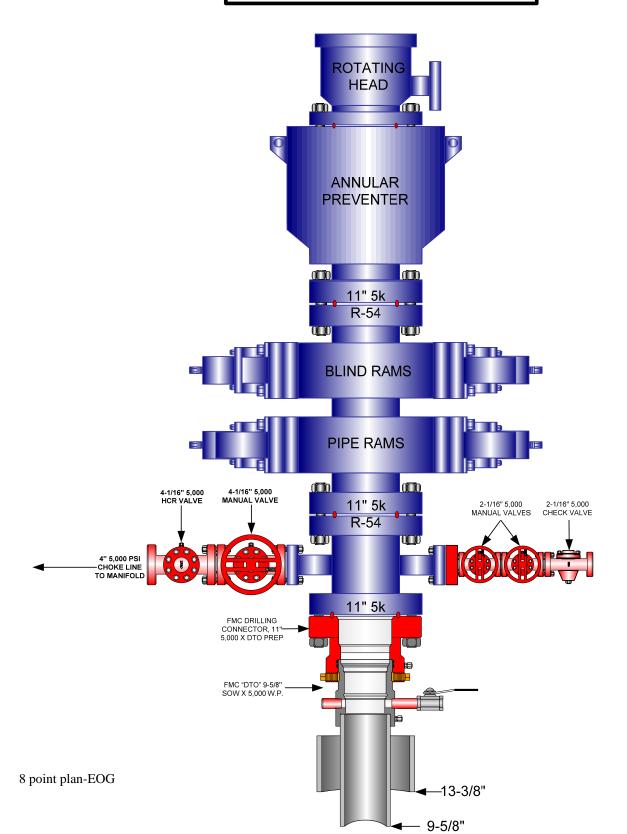


4/3/2009

CHAPITA WELLS UNIT 1267-22

NW/SE, SEC. 22, T9S, R23E, S.L.B.&M.. UINTAH COUNTY, UTAH

EOG RESOURCES CHOKE MANIFOLD CONFIGURATION W/ 5.000 PSI WP VALVES

PAGE 2 0F 2

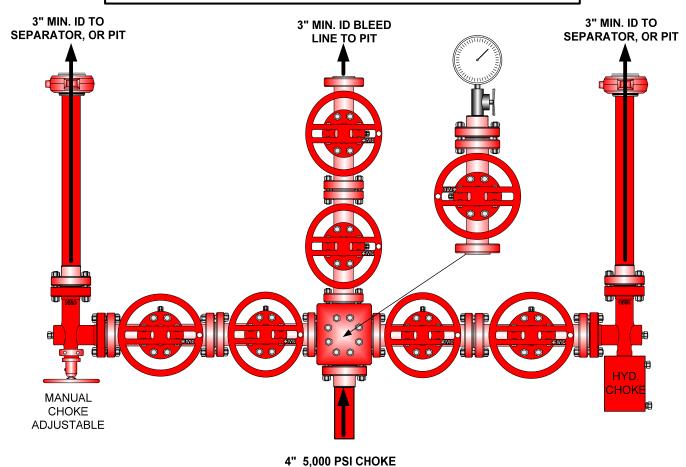

LINE FROM HCR VALVE

Testing Procedure:

- 1. BOP will be tested with a professional tester to conform to Onshore Order #2.
- 2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
- 3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.


Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, w


- 4. hichever is greater.
- 5. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
- 6. All BOPE specifications and configurations will meet Onshore Order #2 requirements.


EOG RESOURCES, INC. CWU #1267-22 SECTION 22, T9S, R23E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; AND PROCEED IN A SOUTHEASTERLY RIGHT DIRECTION APPROXIMATLEY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A DIRECTION APPROXIMATELY 4.5 MILES TO THE SOUTHEASTERLY JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; AND PROCEED IN LEFT A NORTHEASTERLY DIRECTION APPROXIMATLEY 2.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATLEY 0.2 MILES TO JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; PROCEED IN SOUTHEASTERLY, THEN SOUTHWESTERLY, DIRECTION APPROXIMATLEY 0.8 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHEAST; FOLLOW ROAD FLAGS IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 340' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 55.6 MILES.

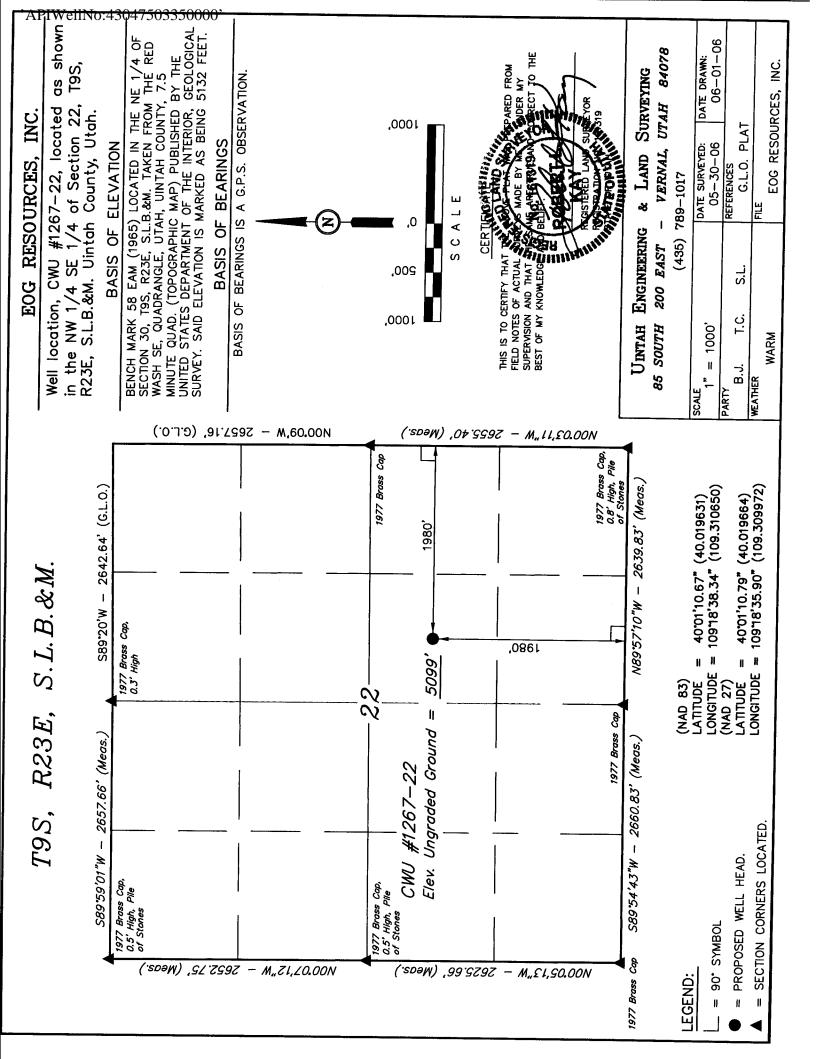

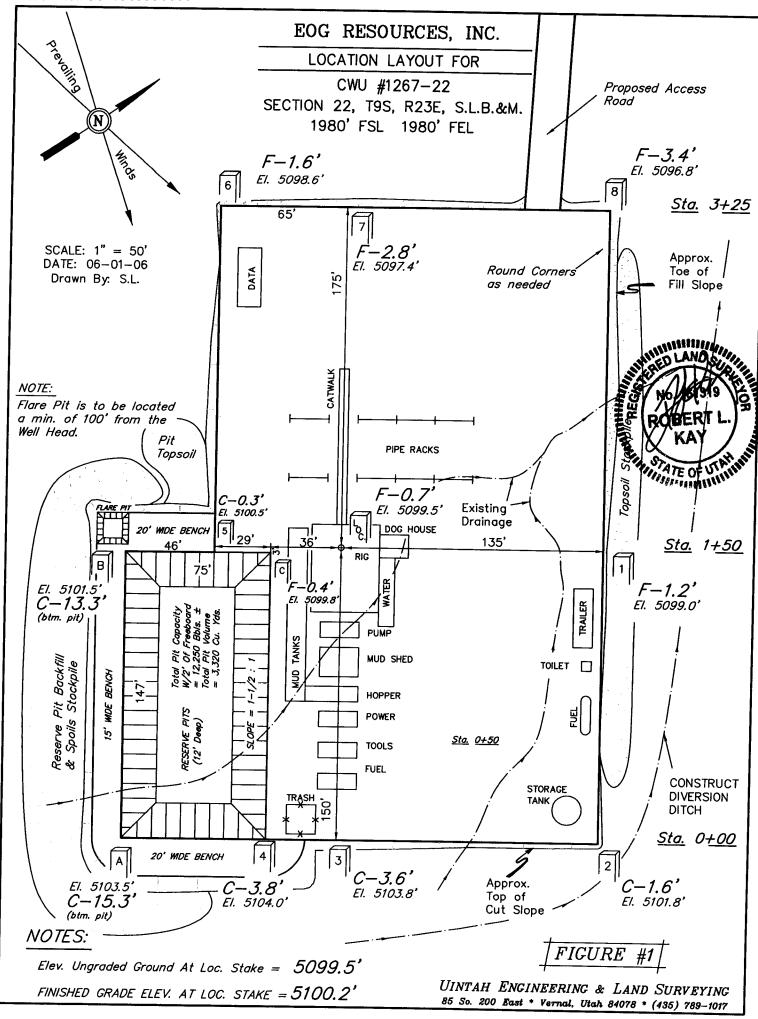

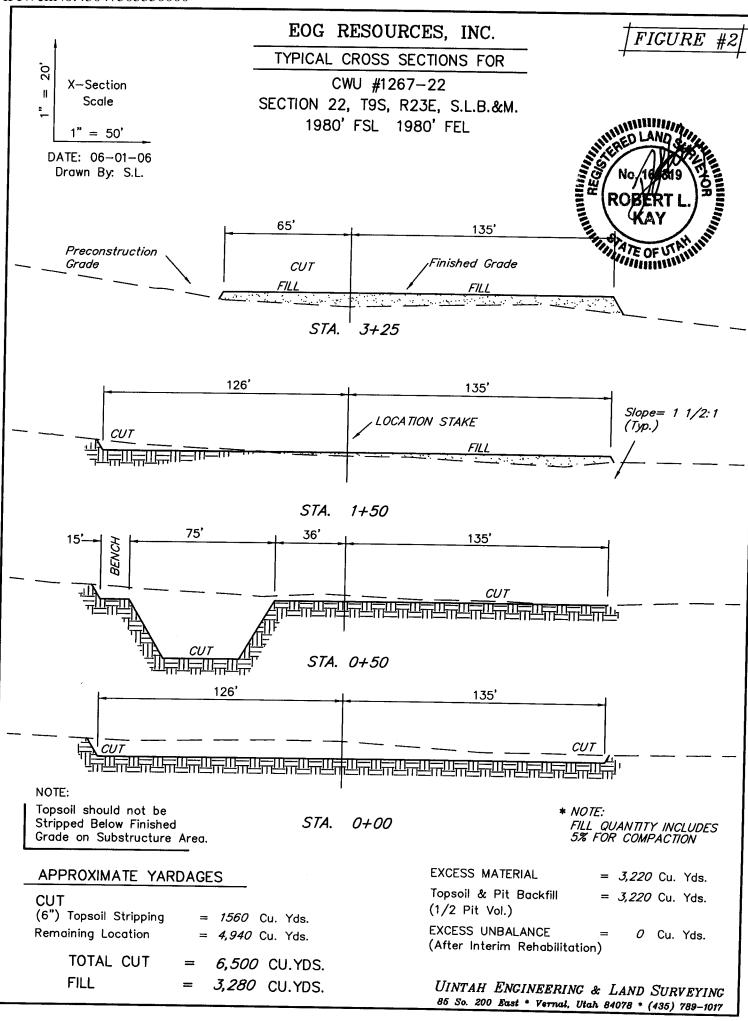

EOG RESOURCES, INC.

CWU #1267-22

LOCATED IN UINTAH COUNTY, UTAH SECTION 22, T9S, R23E, S.L.B.&M.

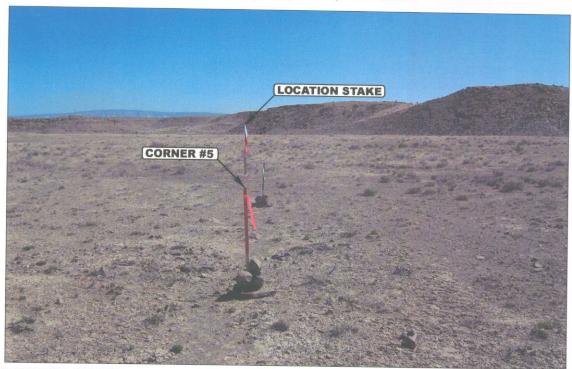


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY

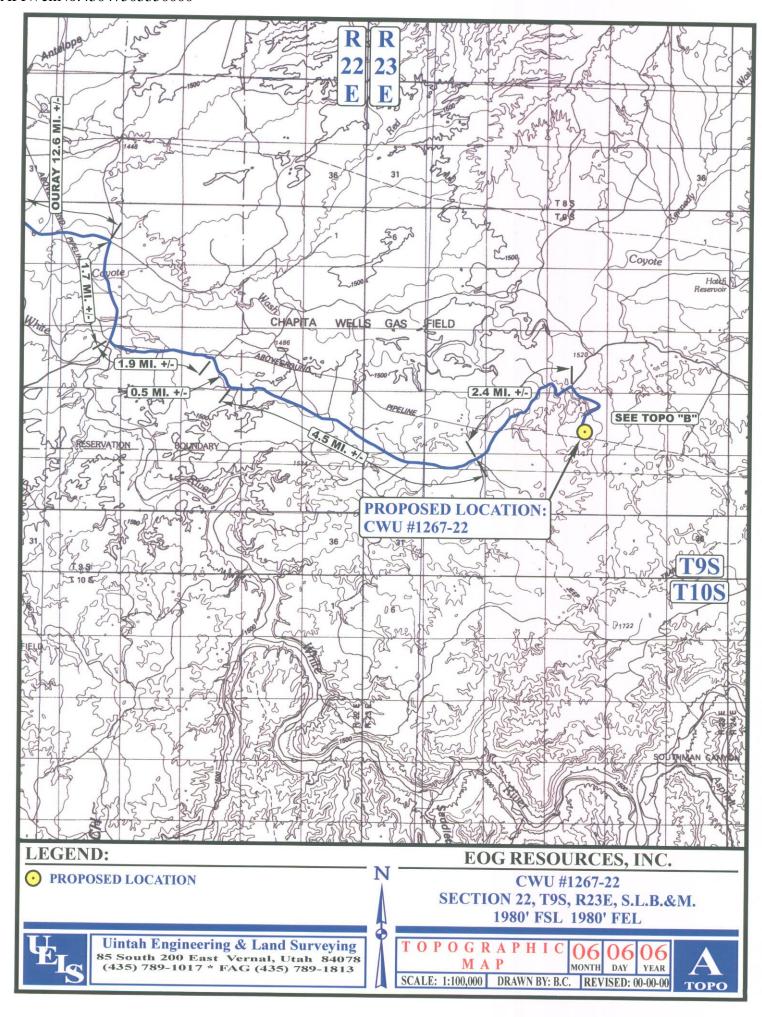



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: EASTERLY








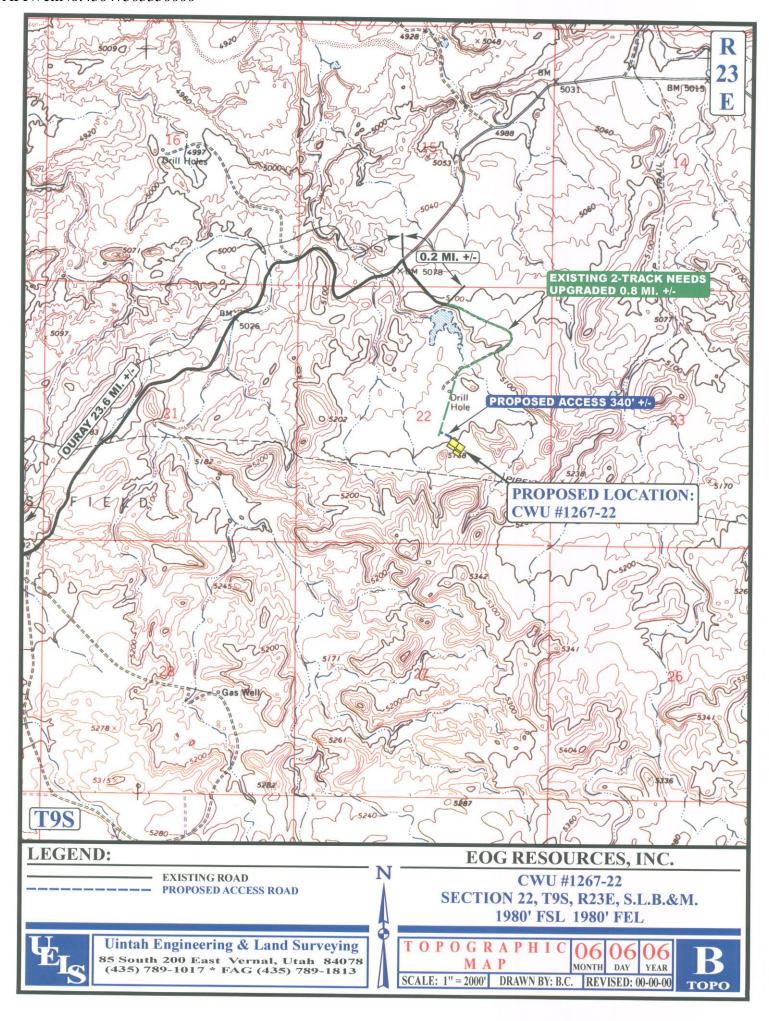

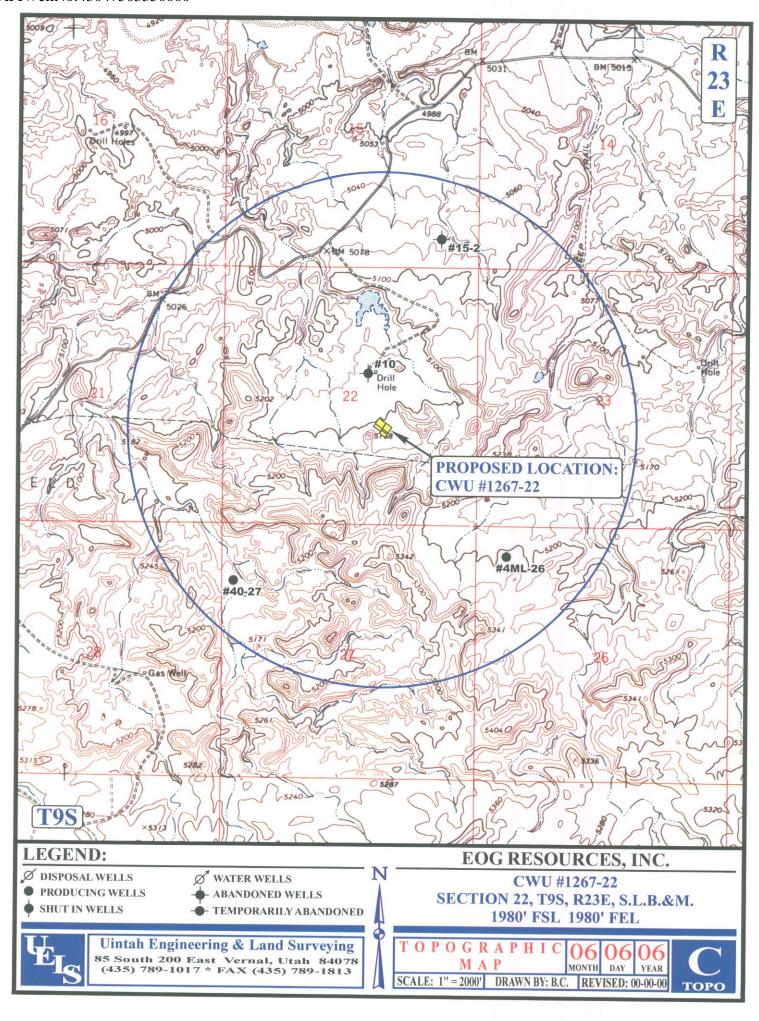

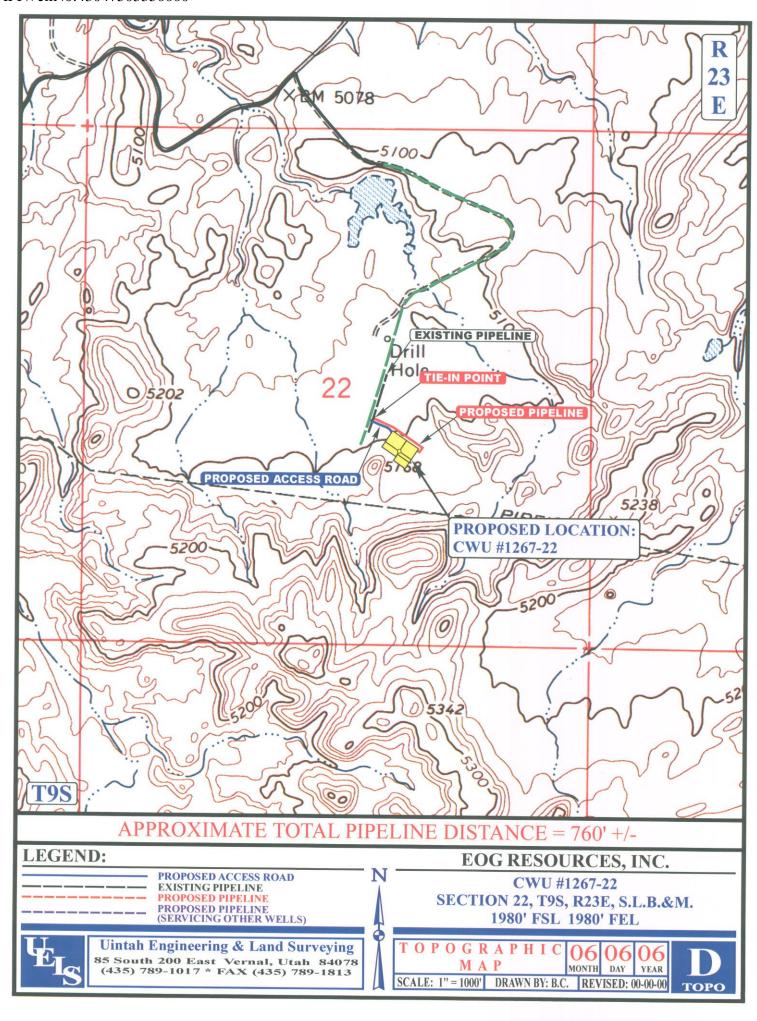



Chapita Wells Unit 1267-22 NWSE, Section 22, T9S, R23E Uintah County, Utah

SURFACE USE PLAN

The well pad is approximately 325 feet long with a 246-foot width, containing 1.84 acres more or less. The well access road is approximately 340 feet long disturbing approximately 0.24 acre. New surface disturbance associated with the well pad and access road is estimated to be 2.07 acres. The pipeline is approximately 760 feet long with a 40-foot temporary right-of-way and an 8-foot permanent right-of-way disturbing approximately 0.14 acre.

1. EXISTING ROADS:

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 55.6 miles south of Vernal, Utah See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 340' in length, with a proposed two-track upgrade of approximately 4224'. Culvert's and low water crossings shall be installed as needed. See attached Topo B.
- B. The access road will be crowned and ditched with a 30-foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.

- H. No gates, cattleguards, or fences will be required or encountered.
- I. A 30-foot permanent right-of-way is requested. No surfacing material will be used.
- J. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed, safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30-foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the roadbed block the drainages. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around then avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 30-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

An offlease right-of-way is not required. The entire well pad, access road, and pipeline are located within the Chapita Wells Unit.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map "C" for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

A. On Well Pad

- Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, one (1) 300-bbl tank and/or two (2) 400-bbl vertical tanks and attaching piping.
- 2. Gas gathering lines A 4" gathering line will be buried from dehy to the edge of the location.

B. Off Well Pad

- 1. Proposed pipeline will transport natural gas.
- 2. The pipeline will be a permanent feeder line.
- 3. The length of the proposed pipeline is 760' x 40' temporary, 760' x 8' permanent right-of-way. The proposed pipeline leaves the eastern edge of the well pad (Lease UTU01301) proceeding in a westerly direction for an approximate distance of 760' tieing into an existing pipeline in the NWSE of Section 22, T9S, R23E. Pipe will be 4" NOM, 0.156 wall, Grade X42, Zap-Lock, electric weld with a 35 mil X-Tru coating.
- 4. Proposed pipeline will be a 4" OD steel, zap-lok line laid on the surface
- 5. Proposed pipeline will be laid on surface.
- 6. An 8-foot permanent pipeline right-of-way is requested. A 40-foot temporary pipeline right-of-way for construction purposes is requested, the temporary right-of-way will be utilized for a 10-day period.
- 7. The proposed pipeline route begins in the NWSE of Section 22, Township 9S, Range 23E, proceeding in a westerly direction for an approximate distance of 760' to the NWSE of Section 22, Township 9S, Range 23E.
- 8. Pipeline will be coupled using the Zap lock method. No additional off-pad facilities will be required.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon**. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be Bonanza Power Plant water source in Sec 26, T8S, R23E, Uintah County, UT (State Water Right # 49-225(A31368)). Water will be hauled by a licensed trucking company.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. Source of Construction Materials:

- A. All construction material for this pipeline will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD, CWU 2-29 SWD, Red Wash Evaporation ponds 1, 2, 3, 4, 5 or 6, Coyote Evaporation Ponds, White River Ponds 1 and 2, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit, through natural or artificial methods, or removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with **felt, and a 16-millimeter plastic liner**. Sufficient bedding (i.e. weed free straw, or hay; felt; polyswell or soil) will be used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the southeast corner of the location. The flare pit will be located downwind of the prevailing wind direction on the south side of the location, a minimum of 100 feet from the wellhead and 30 feet from the reserve pit fence.

The stockpiled pit topsoil (first six inches) will be stored separate from the location. The stockpiled location topsoil will be stored in a location providing easy access for interim reclamation and protection of the topsoil. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the west.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Interim Reclamation (Producing Location)

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of the well completion, or as soon as environmental conditions allow. Before any dirt takes place, the reserve pit must be completely dry and free of all foreign obstacles.

The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
HyCrest Wheatgrass	5.0
Shadscale	4.0
Prostrate Kochia	3.0

^{*}Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

Seed Mixture	Drilled Rate (Ibs./acre PLS*)
Wyoming Big Sage	1.0
Shadscale	4.0
Needle and Threadgrass	4.0
HyCrest Wheatgrass	2.0
Scarlet Globe Mallow	1.0

^{*}Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

Bureau of Land Management

12. OTHER INFORMATION:

- A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:
 - Whether the materials appear eligible for the National Register of Historic Places;
 - The mitigation measures the operator will likely have to undertake before the site can be used.
 - A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application or herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)
- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources survey was conducted and will be submitted Fedruary 13, 2007, Moac Report No. 06-619, by Montgomery Archaeological Consultants. A paleontological survey was conducted and submitted May 1, 2008, IPC Report No. 08-22, by Intermountain Paleo.

Additional Surface Stipulations:

None

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Kaylene R. Gardner Regulatory Administrator EOG Resources, Inc. 1060 East Highway 40 Vernal, UT 84078 (435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.


The operator or his/her contractor shall contact the BLM office at (435) 781-4400 forty-eight (48) hours prior to construction activities.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Chapita Wells Unit 1267-22 Well, located within the NWSE, of Section 22, T9S, R23E, Uintah County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

March 29. 2009	
Date	Kaylene R. Gardner, Regulatory Administrator

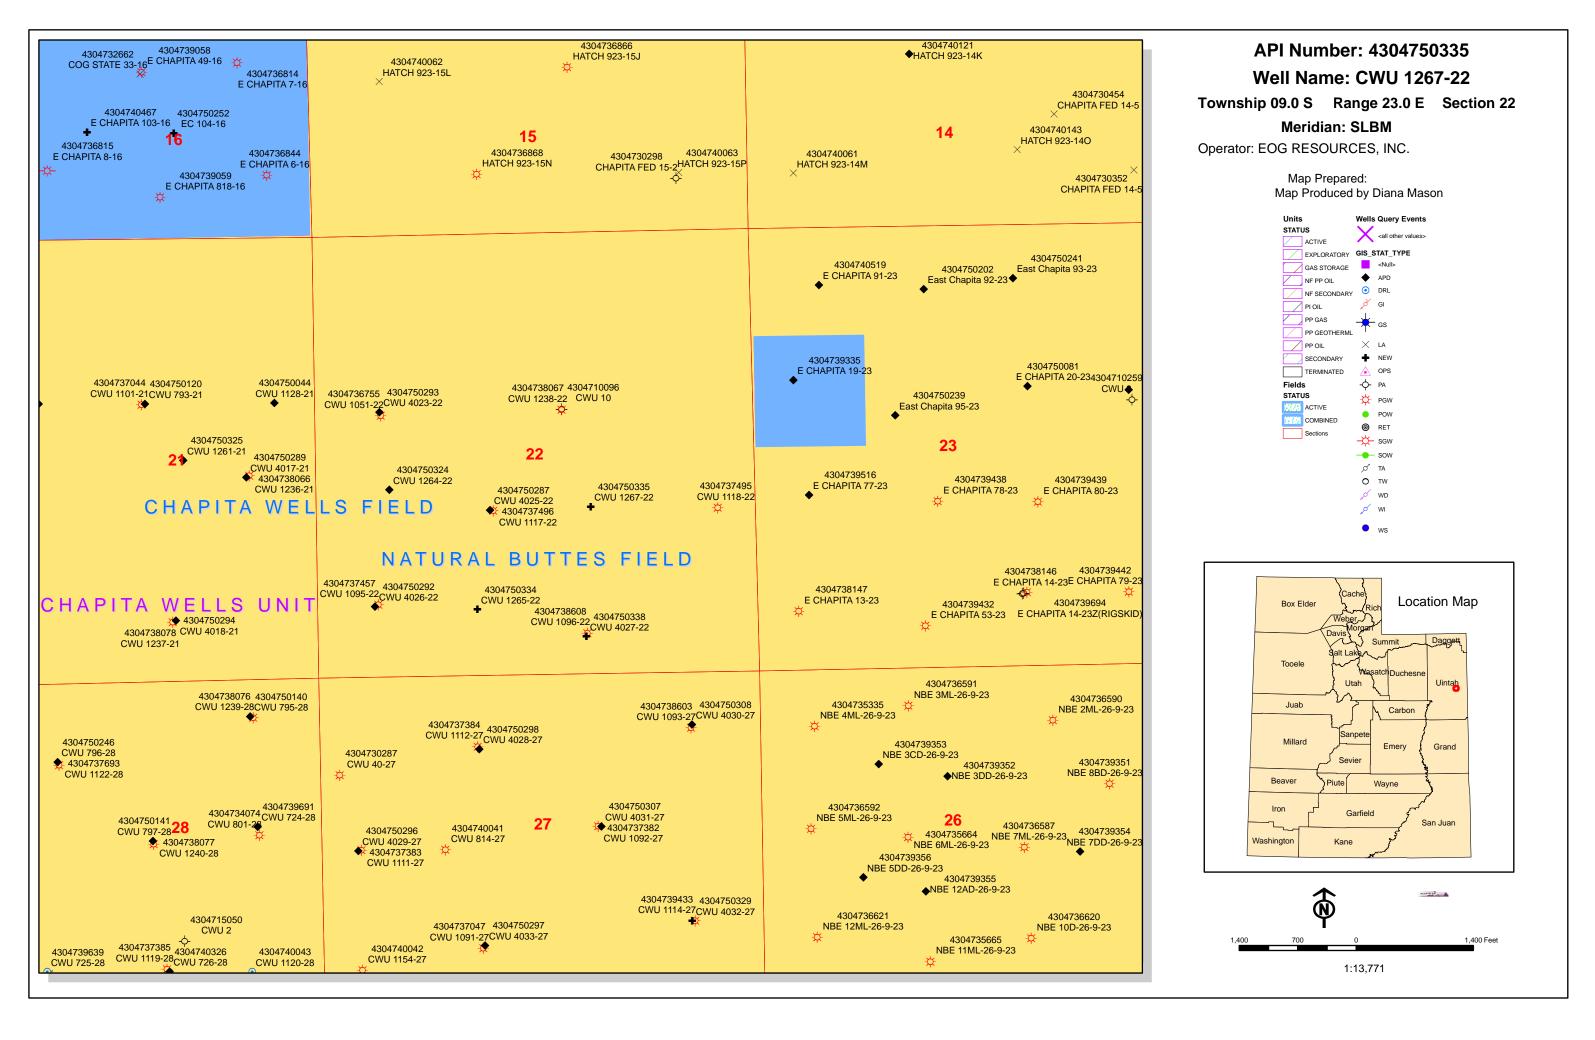

United States Department of the Interior

BUREAU OF LAND MANAGEMENT Utah State Office P.O. Box 45155 Salt Lake City, Utah 84145-0155

IN REPLY REFER TO: 3160 (UT-922)

April 6, 2009

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2009 Plan of Development Chapita Wells Unit Uintah

County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2009 within the Chapita Wells Unit, Uintah County, Utah.

API# WELL NAME LOCATION

(Proposed PZ Wasatch)

43-047-50328 CWU 4012-19 Sec 19 T09S R23E 1792 FSL 0507 FEL 43-047-50329 CWU 4032-27 Sec 27 T09S R23E 2296 FSL 0857 FEL 43-047-50330 CWU 4004-30 Sec 30 T09S R23E 0722 FSL 2214 FEL 43-047-50331 CWU 737-33 Sec 33 T09S R23E 2106 FSL 0700 FWL 43-047-50332 CWU 4011-18 Sec 18 T09S R23E 2204 FSL 0494 FEL 43-047-50336 CWU 4053-27 Sec 27 T09S R23E 0570 FSL 0830 FWL 43-047-50338 CWU 4027-22 Sec 22 T09S R23E 0433 FSL 2057 FEL 43-047-50337 CWU 4035-34 Sec 34 T09S R23E 2033 FSL 0782 FEL

(Proposed PZ Mesaverde)

43-047-50327 CWU 1139-19 Sec 19 T09S R23E 0484 FSL 0489 FEL 43-047-50335 CWU 1267-22 Sec 22 T09S R23E 1980 FSL 1980 FEL 43-047-50334 CWU 1265-22 Sec 22 T09S R23E 0780 FSL 1925 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Chapita Wells Unit


Division of Oil Gas and Mining

Central Files Agr. Sec. Chron Fluid Chron

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED:	4/3/2009	API NO. ASSIGNED:	43047503350000
WELL NAME:	CWU 1267-22		
OPERATOR:	EOG Resources, Inc. (N95	50) PHONE NUMBER:	435 781-9111
CONTACT:	Kaylene Gardner		
PROPOSED LOCATION:	NWSE 22 090S 230E	Permit Tech Review:	
SURFACE:	1980 FSL 1980 FEL	Engineering Review:	
воттом:	1980 FSL 1980 FEL	Geology Review:	
COUNTY:	UINTAH		
LATITUDE:	40.01969	LONGITUDE:	-109.31000
UTM SURF EASTINGS:	644224.00	NORTHINGS:	4431100.00
FIELD NAME:	NATURAL BUTTES		
LEASE TYPE:	1 - Federal		
LEASE NUMBER:	UTU01301	PROPOSED FORMATION:	SEG0
SURFACE OWNER:	1 - Federal	COALBED METHANE:	NO
RECEIVED AND/OR REVIEWE	D:	LOCATION AND SITING:	
⊭ PLAT		R649-2-3.	
▶ Bond: FEDERAL - NM2308		Unit: CHAPITA WELLS	
Potash		R649-3-2. General	
Oil Shale 190-5			
Oil Shale 190-3		R649-3-3. Exception	
Oil Shale 190-13		✓ Drilling Unit	
Water Permit: 49-225		Board Cause No: Cause 179-8	
RDCC Review:		Effective Date: 8/10/1999	
Fee Surface Agreement		Siting: Suspends General Siting	
Intent to Commingle		R649-3-11. Directional Drill	
Comments: Presite Compl	leted		
comments. Fresite Compi	eteu		
Stipulations: 4 - Federal A	pproval - dmason		
•	••		

API Well No: 43047503350000



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: CWU 1267-22 API Well Number: 43047503350000

Lease Number: UTU01301 **Surface Owner:** FEDERAL **Approval Date:** 4/8/2009

Issued to:

EOG Resources, Inc., 1060 East Highway 40, Vernal, UT 84078

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 179-8.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

Notification Requirements:

Notify the Division with 24 hours of spudding the well.

• Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

• Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

Reporting Requirements:

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

API Well No: 43047503350000

Approved By:

For Gil Hunt Associate Director, Oil & Gas

STATE OF UTAH		FORM 9	
DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING			5.LEASE DESIGNATION AND SERIAL NUMBER: UTU01301
SUNDE	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:		
	sals to drill new wells, significantly deeper gged wells, or to drill horizontal laterals.		7.UNIT OF CA AGREEMENT NAME: CHAPITA WELLS
1. TYPE OF WELL Gas Well			8. WELL NAME and NUMBER: CWU 1267-22
2. NAME OF OPERATOR: EOG Resources, Inc.			9. API NUMBER: 43047503350000
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Verna	I, UT, 84078 435 781-9	PHONE NUMBER: 111 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 1980 FEL			COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSHI Qtr/Qtr: NWSE Section: 22	P, RANGE, MERIDIAN: Township: 09.0S Range: 23.0E Meridian:	: S	STATE: UTAH
11. CHE	CK APPROPRIATE BOXES TO INDICA	TE NATURE OF NOTICE, REPORT,	, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTION	
✓ NOTICE OF INTENT Approximate date work will start: 3/25/2010	☐ ACIDIZE ☐ CHANGE TO PREVIOUS PLANS	☐ ALTER CASING ☐ CHANGE TUBING	CASING REPAIR CHANGE WELL NAME
SUBSEQUENT REPORT	☐ CHANGE WELL STATUS ☐ DEEPEN	☐ COMMINGLE PRODUCING FORMATIONS ☐ FRACTURE TREAT	☐ CONVERT WELL TYPE ☐ NEW CONSTRUCTION
Date of Work Completion:	OPERATOR CHANGE	PLUG AND ABANDON	PLUG BACK
SPUD REPORT Date of Spud:	☐ PRODUCTION START OR RESUME ☐ REPERFORATE CURRENT FORMATION	☐ RECLAMATION OF WELL SITE ☐ SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON
	☐ TUBING REPAIR	☐ VENT OR FLARE	WATER DISPOSAL
DRILLING REPORT Report Date:	☐ WATER SHUTOFF	SI TA STATUS EXTENSION	✓ APD EXTENSION
	☐ WILDCAT WELL DETERMINATION	☐ OTHER	OTHER:
	MPLETED OPERATIONS. Clearly show all perespectfully requests the APE extended for one year.	O for the referenced well be	
NAME (PLEASE PRINT) Mickenzie Gates	PHONE NUMBEI 435 781-9145	R TITLE Operations Clerk	
SIGNATURE N/A		DATE 3/25/2010	



The Utah Division of Oil, Gas, and Mining

- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047503350000

API: 43047503350000 Well Name: CWU 1267-22

Location: 1980 FSL 1980 FEL QTR NWSE SEC 22 TWNP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 4/8/2009

with legal rights to drill on the property as the req

informati	on as submitted in the	previously appro	oved application	to drill, rema	ins valid and does not which should be verified.
	ed on private land, hadd? 🗍 Yes 📵 No	s the ownership o	changed, if so, h	as the surface	e agreement been
	ny wells been drilled in equirements for this lo			l which would	l affect the spacing or
	ere been any unit or ot proposed well? 🔘 Y		put in place that	could affect t	the permitting or operation
	nere been any changes he proposed location?			nership, or ri	ghtof- way, which could
• Has the	e approved source of w	rater for drilling o	changed? 📵 Y	es 📵 No	
	nere been any physical in plans from what w				te which will require a s 📵 No
• Is bond	ling still in place, whic	h covers this pro	posed well?		Approved by the Utah Division of Dil, Gas and Mining
nature:	Mickenzie Gates	Date: 3/25/201	0		
Title: (Operations Clerk Repres	enting: EOG RES	OURCES, INC.	Date	March 31, 2010
	•	_		David	K ORCH (V)

Sig

Sundry Number: 13690 API Well Number: 43047503350000

	STATE OF UTAH				FORM 9	
DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING				5.LEAS UTU0	SE DESIGNATION AND SERIAL NUMBER: 1301	
SUNDRY NOTICES AND REPORTS ON WELLS				6. IF I	NDIAN, ALLOTTEE OR TRIBE NAME:	
	sals to drill new wells, significantly deepe igged wells, or to drill horizontal laterals.				F OF CA AGREEMENT NAME: ITA WELLS	
1. TYPE OF WELL Gas Well					8. WELL NAME and NUMBER: CWU 1267-22	
2. NAME OF OPERATOR: EOG Resources, Inc.					9. API NUMBER: 43047503350000	
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Verna			UMBER: xt		LD and POOL or WILDCAT: RAL BUTTES	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 1980 FEL				COUNT		
QTR/QTR, SECTION, TOWNSHI Qtr/Qtr: NWSE Section: 22	P, RANGE, MERIDIAN: Township: 09.0S Range: 23.0E Meridian	: S		STATE		
11. CHE	CK APPROPRIATE BOXES TO INDICA	ATE N	ATURE OF NOTICE, REPORT	, OR OT	HER DATA	
TYPE OF SUBMISSION			TYPE OF ACTION			
_	ACIDIZE		ALTER CASING		CASING REPAIR	
NOTICE OF INTENT Approximate date work will start:	☐ CHANGE TO PREVIOUS PLANS		CHANGE TUBING		CHANGE WELL NAME	
3/21/2011	☐ CHANGE WELL STATUS		COMMINGLE PRODUCING FORMATIONS		CONVERT WELL TYPE	
SUBSEQUENT REPORT	☐ DEEPEN		FRACTURE TREAT		NEW CONSTRUCTION	
Date of Work Completion:	OPERATOR CHANGE		PLUG AND ABANDON		PLUG BACK	
_	☐ PRODUCTION START OR RESUME		RECLAMATION OF WELL SITE		RECOMPLETE DIFFERENT FORMATION	
SPUD REPORT Date of Spud:	REPERFORATE CURRENT FORMATION	□ :	SIDETRACK TO REPAIR WELL		TEMPORARY ABANDON	
	☐ TUBING REPAIR		VENT OR FLARE		WATER DISPOSAL	
☐ DRILLING REPORT	☐ WATER SHUTOFF	□ :	SI TA STATUS EXTENSION	-	APD EXTENSION	
Report Date:	☐ WILDCAT WELL DETERMINATION		OTHER	ОТІ	HER:	
	respectfully requests the AP extended for one year	D fo	r the referenced well b	oe .	Approved by the Utah Division of II, Gas and Mining 03/23/2011	
NAME (PLEASE PRINT) Michelle Robles	PHONE NUMBER 307 276-4842	R	TITLE Regulatory Assistant			
SIGNATURE N/A			DATE 3/21/2011			

Sundry Number: 13690 API Well Number: 43047503350000



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047503350000

API: 43047503350000 **Well Name:** CWU 1267-22

Location: 1980 FSL 1980 FEL QTR NWSE SEC 22 TWNP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 4/8/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

 If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
 Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
• Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
 Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
• Has the approved source of water for drilling changed? Yes No
 Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
• Is bonding still in place, which covers this proposed well? Yes No

Signature: Michelle Robles **Date:** 3/21/2011

Title: Regulatory Assistant **Representing:** EOG RESOURCES, INC.

Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

5.	Lease Serial No.
	UTU01301

UTU01301	

E	BUREAU OF LAND MANA	AGEMENT 1.4	CACVA	n 1 i		July 31, 2010
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.			5. Lease Serial No. UTU01301			
abandoned we	II. Use form 3160-3 (AP	(D) for such prop	osak. M		6. If Indian, Allottee of	r Tribe Name
SUBMIT IN TRI	IPLICATE - Other instruc	ctions on reverse	side.		7. If Unit or CA/Agree UTU63013BF	ment, Name and/or N
1. Type of Well					8. Well Name and No.	
Oil Well Gas Well Ot 2. Name of Operator		MICKENZIE GAT	EC		9. API Well No.	
EOG RESOURCES INC	E-Mail: MICKENZ	IE_gates@EOGRES	SOURCES.C		43-047-50335- 0	0-X1
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078		3b. Phone No. (inc Ph: 453.781.91)	10. Field and Pool, or NATURAL BUT	
4. Location of Well (Footage, Sec., 7	., R., M., or Survey Description	n)			11. County or Parish,	and State
Sec 22 T9S R23E NWSE 198 40.019631 N Lat, 109.310650					UINTAH COUN	ry, ut
12. CHECK APPI	ROPRIATE BOX(ES) TO) INDICATE NA	TURE OF 1	NOTICE, RI	L EPORT, OR OTHER	R DATA
TYPE OF SUBMISSION			TYPE O	F ACTION		
Notice of Intent	☐ Acidize	□ Deepen		Product	ion (Start/Resume)	☐ Water Shut-Of
Subsequent Report	☐ Alter Casing	☐ Fracture		□ Reclama	ation	☐ Well Integrity
	☐ Casing Repair	□ New Con		□ Recomp	olete	Other
Final Abandonment Notice	Change Plans	Plug and		_	arily Abandon	Change to Origin PD
	Convert to Injection	Plug Back		□ Water D		
13. Describe Proposed or Completed Ope If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fi	rk will be performed or provide operations. If the operation responds on the operation responds on the operation of the operation of the operation is an additional operation.	give subsurface location the Bond No. on file walts in a multiple com	ons and measu with BLM/BLA	red and true ve A. Required sul	ertical depths of all pertine bsequent reports shall be	ent markers and zones. filed within 30 days
EOG Resources, Inc. respectf	ully requests the APD for	the referenced we	ell be exten	ded for two	years.	
		RECE	IVED	pula SCHRAFFE (STERRAFFE)		
				4	RNAL FIELD OFFI	· •
			5 2011	1	3 KLH 6/1/1	
		DIV. OF OIL,	BAS & MININ	NG GEO	DL.	
CONDIT	IONS OF APPROVAL	ATTACHED		E.S.		
				PET		Accordance 2
14. I hereby certify that the foregoing is	true and correct.			HEC	7	
Comn	Electronic Submission #1 For EOG R nitted to AFMSS for proces	RESOURCES INC. :	sent to the \	/ernal	•	androide de la constante de la
Name (Printed/Typed) MICKENZI		Title		TIONS CLEI	•	
Signature (Electronic Signature Signature (Electronic Signature Si	ubmission)	Date	05/24/20	211		
/Elocatolile 50	THIS SPACE FO		05/24/20		\ E	
	I NIS SPACE FU	TEDERAL OF	SIAIE	JEFICE US		

Approved By Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Assistant Field Manager Title Lands & Mineral Resources

JUN B.6 2011

VERNAL FIELD OFFICE Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CONDITIONS OF APPROVAL

EOG RESOURCES INC

Notice of Intent APD Extension

Lease:

UTU-01301

Well:

CWU 1267-22

Location:

NWSE Sec 22-T9S-R23E

An extension for the referenced APD is granted with the following conditions:

- 1. The extension and APD shall expire on 3-31-2013.
- 2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Robin L Hansen of this office at (435) 781-2777

Sundry Number: 24675 API Well Number: 43047503350000

	STATE OF UTAH DEPARTMENT OF NATURAL RESOUR			FORM 9
[5.LEASE DESIGNATION AND SERIAL NUMBER: UTU01301			
SUNDR	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
	posals to drill new wells, significantl reenter plugged wells, or to drill horiz n for such proposals.			7.UNIT or CA AGREEMENT NAME: CHAPITA WELLS
1. TYPE OF WELL Gas Well				8. WELL NAME and NUMBER: CWU 1267-22
2. NAME OF OPERATOR: EOG Resources, Inc.				9. API NUMBER: 43047503350000
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000	N , Denver, CO, 80202	PHONE NU 435 78	IMBER: 1-9111 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 1980 FEL				COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSH Qtr/Qtr: NWSE Section: 2	HIP, RANGE, MERIDIAN: 22 Township: 09.0S Range: 23.0E Me	eridian: S		STATE: UTAH
11. CHECI	K APPROPRIATE BOXES TO INDICA	ATE NATUR	E OF NOTICE, REPOR	RT, OR OTHER DATA
TYPE OF SUBMISSION		т	YPE OF ACTION	
	ACIDIZE	ALTER CA	ASING	CASING REPAIR
Approximate date work will start:	CHANGE TO PREVIOUS PLANS	CHANGE	TUBING	CHANGE WELL NAME
4/10/2012	CHANGE WELL STATUS	COMMING	GLE PRODUCING FORMATIONS	CONVERT WELL TYPE
SUBSEQUENT REPORT	DEEPEN	FRACTUR	E TREAT	NEW CONSTRUCTION
Date of Work Completion:	OPERATOR CHANGE	PLUG AN	D ABANDON	PLUG BACK
	PRODUCTION START OR RESUME	RECLAMA	ATION OF WELL SITE	RECOMPLETE DIFFERENT FORMATION
SPUD REPORT Date of Spud:	REPERFORATE CURRENT FORMATION	SIDETRAC	CK TO REPAIR WELL	TEMPORARY ABANDON
	TUBING REPAIR	VENT OR	FLARE	WATER DISPOSAL
DRILLING REPORT	WATER SHUTOFF	☐ SI TA STA	ATUS EXTENSION	✓ APD EXTENSION
Report Date:	WILDCAT WELL DETERMINATION	OTHER		OTHER:
44 DESCRIPE PROPOSED OR				
	completed operations. Clearly showns. respectfully requests the well be extended for one	e APD for		Approved by the Utah Division of Oil, Gas and Mining
				Date: April 10, 2012
				By: Bacylll
NAME (PLEASE PRINT)	PHONE NUM			
Mickenzie Gates	435 781-9145		rations Clerk	
SIGNATURE N/A		DAT 4/10	E 0/2012	

Sundry Number: 24675 API Well Number: 43047503350000



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047503350000

API: 43047503350000 Well Name: CWU 1267-22

Location: 1980 FSL 1980 FEL QTR NWSE SEC 22 TWNP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 4/8/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

• If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
 Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
 Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
• Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? (Yes (No
• Has the approved source of water for drilling changed? 🔘 Yes 📵 No
• Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
• Is bonding still in place, which covers this proposed well? Yes No
nature: Mickenzie Gates Date: 4/10/2012

Title: Operations Clerk Representing: EOG RESOURCES, INC.

Sundry Number: 36154 API Well Number: 43047503350000

	STATE OF UTAH DEPARTMENT OF NATURAL RESOURCE		FORM 9
ı	5.LEASE DESIGNATION AND SERIAL NUMBER: UTU01301		
SUNDR	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:		
	oposals to drill new wells, significantly or reenter plugged wells, or to drill horizor n for such proposals.		7.UNIT or CA AGREEMENT NAME: CHAPITA WELLS
1. TYPE OF WELL Gas Well			8. WELL NAME and NUMBER: CWU 1267-22
2. NAME OF OPERATOR: EOG Resources, Inc.			9. API NUMBER: 43047503350000
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000	O N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FSL 1980 FEL			COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSH	HIP, RANGE, MERIDIAN: 22 Township: 09.0S Range: 23.0E Merid	ian: S	STATE: UTAH
11. CHEC	K APPROPRIATE BOXES TO INDICAT	E NATURE OF NOTICE, REPOR	RT, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTION	
	CHANGE TO PREVIOUS PLANS CHANGE WELL STATUS DEEPEN OPERATOR CHANGE PRODUCTION START OR RESUME REPERFORATE CURRENT FORMATION TUBING REPAIR WATER SHUTOFF WILDCAT WELL DETERMINATION COMPLETED OPERATIONS. Clearly show and C. respectfully requests the Ambull be extended for one years.	APD for the referenced	CASING REPAIR CHANGE WELL NAME CONVERT WELL TYPE NEW CONSTRUCTION PLUG BACK RECOMPLETE DIFFERENT FORMATION TEMPORARY ABANDON WATER DISPOSAL ✓ APD EXTENSION OTHER: Depths, volumes, etc. Approved by the Utah Division of Oil, Gas and Mining Date: April 09, 2013 By:
NAME (PLEASE PRINT)	PHONE NUMBI		
Vail Nazzaro SIGNATURE	303 824-5590	Sr. Regulatory Assistant DATE	
N/A		4/1/2013	

Sundry Number: 36154 API Well Number: 43047503350000



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047503350000

API: 43047503350000 **Well Name:** CWU 1267-22

Location: 1980 FSL 1980 FEL QTR NWSE SEC 22 TWNP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 4/8/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

• If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
 Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
 Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
• Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? (Yes (No
• Has the approved source of water for drilling changed? 🔘 Yes 📵 No
 Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
• Is bonding still in place, which covers this proposed well? 🌘 Yes 🔘 No
Insture: Voil Nezzoro

Signature: Vail Nazzaro Date: 4/1/2013

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

Form 3160-3 (August 2007)

RECEIVED

FORM APPROVED OMB No. 1004-0136 Expires July 31, 2010

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

APR 0 3 2009

	Expires July	

APPLICATION FOR PERMIT	TO DRILL OR RE	ENTER I M	6. If Indian, Allottee or Tribo	Name
Ia. Type of Work: DRILL REENTER			7. If Unit or CA Agreement, UTU63013BF	Name and No.
lb. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Oth	er 🗖 Sing	le Zone Multiple Zone	8. Lease Name and Well No. CWU 1267-22	
2. Name of Operator Contact:	KAYLENE R GARD IE_GARDNER@EOGRE	NER	9. API Well No. 43 DA7 503	35
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (included Ph: 435-781-911		10. Field and Pool, or Explo NATURAL BUTTES	ratory
4. Location of Well (Report location clearly and in accorded	ince with any State requ	irements.*)	11. Sec., T., R., M., or Blk. a	and Survey or Area
At surface NWSE 1980FSL 1980FEL At proposed prod. zone NWSE 1980FSL 1980FEL	ŕ		Sec 22 T9S R23E Me SME: BLM	er SLB
		0.01000 17 2011	12 County or Borish	1 12 State
14. Distance in miles and direction from nearest town or post 55.6 MILES SOUTH OF VERNAL, UT			12. County or Parish UINTAH	13. State
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1980	16. No. of Acres in L	ease	17. Spacing Unit dedicated t	o this well
18. Distance from proposed location to nearest well, drilling,	19. Proposed Depth	<u>-</u>	20. BLM/BIA Bond No. on	file
completed, applied for, on this lease, ft. 1185	8790 MD 8790 TVD		NM2308	
21. Elevations (Show whether DF, KB, RT, GL, etc. 5099 GL	22. Approximate date	work will start	23. Estimated duration 45-DAYS	
	24. Atta	achments		
The following, completed in accordance with the requirements of	of Onshore Oil and Gas	Order No. 1, shall be attached to	this form:	
2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification			ons unless covered by an existing formation and/or plans as may	
25. Signature (Electronic Submission)	Name (Printed/Typed) KAYLENE R G	ARDNER Ph: 435-781-9	111	Date 04/03/2009
Title LEAD REGULATORY ASSISTANT				
Approved by (Signature)	Name (Printed/Typed) Teasy Kaveela		JU	$N^{\text{Date}} 9 200$
Title (35) Star (1900) Manager Ands & Mineral Resources	Office VERNAL	FIELD OFFICE		
Application approval does not warrant or certify the applicant hoperations thereon. Conditions of approval, if any, are attached.	O EMOITI	FAPPROVAL	ATTACHED	•
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, States any false, fictitious or fraudulent statements or representa	make it a crime for any tions as to any matter w	person knowingly and willfully ithin its jurisdiction.	to make to any department or a	igency of the United

Additional Operator Remarks (see next page)

NOTICE OF APPROVAL

Electronic Submission #68667 verified by the BLM Well Information System For EOG RESOURCES INC, sent to the Vernal Committed to AFMSS for processing by GAIL JENKINS on 04/03/2009 (09GXJ3679AE)

JUN 15 2009

パタルメブ 3ましたみじ

100 63 67 20 9



UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

VERNAL FIELD OFFICE VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:

EOG Resources, Inc.

Location:

NWSE, Sec. 22, T9S, R23E

Well No: API No:

CWU 1267-22 43-047-50335 Lease No:

UTU-01301

Agreement:

Chapita Wells Unit

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	
NRS/Enviro Scientist:	Christine Cimiluca	(435) 781-4475	•
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	(435) 828-4029
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Lori Ford	(435) 781-4406	•
NRS/Enviro Scientist:	David Gordon	(435) 781-4424	
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	(435) 828-3546
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	(435) 828-7381
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
	-	Fax: (435) 781-3420	•

A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR FIELD REPRESENTATIVE TO INSURE COMPLIANCE

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

Page 2 of 6 Well: CWU 1267-22 6/5/2009

SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.
- Prevent fill and stock piles from entering drainages.
- The access road shall be crowned and ditched. Flat-bladed roads are not allowed.
- The authorized officer may prohibit surface disturbing activities during severe winter, wet, or muddy conditions to minimize watershed damage. This limitation does not apply to operation and maintenance of producing wells.
- If additional erosion occurs during the life of this project, more culverts, low water crossings, berms, wing ditches, or gravel (from a private or commercial source) etc. shall be needed to control the erosion. Low-water crossings and culverts shall be appropriately constructed to avoid sedimentation of drainage ways and other water resources.
- Bury pipelines at all low water crossings.
- Surface pipelines will be placed 5-10 feet outside of the borrow area.
- Surface pipelines will be placed in such a way that they will not wander into the borrow area.
- Pipelines will be buried at all major road and drainage crossings.
- The pit liner is to be cut 5 feet below ground surface or at the level of the cuttings, whichever is deeper, and the excess liner material is to be disposed of at an authorized disposal site.

Page 3 of 6 Well: CWU 1267-22 6/5/2009

DOWNHOLE PROGRAM CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

- The production casing cement shall extend a minimum of 200 feet above the surface casing shoe.
- A formation integrity test shall be performed at the surface casing shoe.
- Gamma Ray Log shall be run from Total Depth to Surface.

Variances Granted

Air Drilling

- Dust suppression equipment. Variance granted for water mist system to substitute for the dust suppression equipment.
- Blooie line discharge 100' from the well bore, variance granted for blooie line discharge to be 75' from the well bore.
- Compressors located in the opposite direction from the blooie line a minimum of 100' from the well bore. Variance granted for truck/trailer mounted air compressors.
- Straight run blooie line. Variance granted for targeted "T's" at bends.
- Automatic igniter. Variance granted for igniter due to water mist.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times.
 Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil &

Page 4 of 6 Well: CWU 1267-22 6/5/2009

Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and <u>NOT</u> by the rig pumps. Test shall be reported in the driller's log.

- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- Cement baskets shall not be run on surface casing.
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water
 is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM
 Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

Page 5 of 6 Well: CWU 1267-22 6/5/2009

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be
 notified when it is placed in a producing status. Such notification will be by written
 communication and must be received in this office by not later than the fifth business day
 following the date on which the well is placed on production. The notification shall provide, as a
 minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - o The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - o Unit agreement and/or participating area name and number, if applicable.
 - o Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

Page 6 of 6 Well: CWU 1267-22 6/5/2009

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted
 to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs
 first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be
 adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively
 sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover
 equipment shall be removed from a well to be placed in a suspended status without prior
 approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30
 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given
 before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office
 Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in
 order that a representative may witness plugging operations. If a well is suspended or
 abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent
 Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual
 plugging of the well bore, showing location of plugs, amount of cement in each, and amount of
 casing left in hole, and the current status of the surface restoration.



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER

Executive Director

June 11, 2014

Division of Oil, Gas and Mining JOHN R. BAZA

Division Director

EOG Resources, Inc. 600 17th Street, Suite 1000 N. Denver, CO 80202

Re:

APDs Rescinded for EOG Resources, Inc., Uintah County

Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective June 11, 2014.

A new APD must be filed with this office for approval <u>prior</u> to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason

Environmental Scientist

cc:

Well File

Bureau of Land Management, Vernal



43-047-50328	CWU 4012-19
43-047-50329	CWU 4032-27
43-047-50330	CWU 4004-30
43-047-50331	CWU 737-33
43-047-50332	CWU 4011-18
43-047-50334	CWU 1265-22
43-047-50335	CWU 1267-22
43-047-50336	CWU 4053-27
43-047-50337	CWU 4035-34
43-047-50338	CWU 4027-22